

POC-624 Preliminary edition

24" Point-of-Care Terminal with 11th Generation Intel® Processor



Features

- 11th generation Intel® Core™ i5/i7 processor
- 23.8" full HD display with multi-touch P-CAP control
- Multiple I/O, including USB 3.2 Gen 2 (Type A), USB 3.2 Gen 2 (Type C) with display function, and HDMI
- PCIe x4, mini PCIe, M.2 expansion slots for integrating add-on modules
- Fanless design with IP54-rated protection for superior hygiene and infection control
- Equipped with Advantech's DeviceOn device management software
- Optional Wi-Fi, Bluetooth, RFID, smart card reader, Li-ion battery pack, and auto-focus 5 megapixel camera
- Optional hot-swapping battery module with up to 180Wh capacity for mobile applications
- Equipped with DeviceOn/iService software for remote device management



Introduction

POC-624 is equipped with an integrated NVME SSD that facilitates real-time data processing and storage. Compliant with IEC 60601-1 medical safety standards for electrical devices, POC-6 terminals are built for reliable operation in a wide range of healthcare environments.

Moreover, POC-624 is equipped with Advantech's DeviceOn/iService software, which is a next-generation unified device management solution based on the WISE-DeviceOn platform. With support for batch operations and multi-device control, DeviceOn/iService enables easy device configuration and deployment for convenient remote device management.

Specifications


System	Processor*	Intel® Core™ i7-1185G7E (12M cache, up to 4.40 GHz) Intel® Core™ i5-1145G7E (8M cache, up to 4.10 GHz)
	Memory (default)	8G DDR4 (supports up to 64GB DDR4 SODIMM)
	Operating System (optional)	Windows 10 IoT Ent (64 bits only), Linux (supported upon request)
Storage	Primary Storage (default)	NVME SSD 512GB (M.2 2280)
	Secondary Storage (optional)	2.5" SATA SSD available
Display	Size	23.8 inch
	Max. Resolution	1920 x 1080
Touch	Type	10-point multi touch P-CAP (clear glass); optional AG/AR support upon request
I/O	USB 3.2 Gen 2 (Type A)	4
	USB 3.2 Gen 2 (Type C)	1 (with display function)
	USB 2.0 Type A	2
	HDMI	1
	LAN isolation, 1.5KV	2
	Mic-In/Headphone-Out	1/1
Expansion Slots	COM (RS232) 1.5KV	2
	PCIe x4**	1 (card length: 167.65 mm/6.6 in)
	M.2 2230	1 (for Wi-Fi/Bluetooth module)
Other Functions	Mini PCIe	1 (full size)
	Speaker	2 x 2W
	LED Book Light	2
	Camera	1 x 5 megapixel (optional)
Power Input	TPM 1.2/2.0	2.0 (default via software)
	DC/AC	DC model: 18V, max. 100W/AC model: 100 – 240V, max. 150W (choose either DC or AC model)
IP Rating	Front Panel	IP65
	System	IP54
Authentication Solution (Choose 1)	RFID Reader	Optional (choose either RFID or smart card reader)
	Smart Card Reader	Optional (choose either RFID or smart card reader)
Battery Solutions (Choose 1)	Backup Battery**	Optional (choose either 1 backup battery or PCIe x4)
	Hot-Swapping Battery Module	Optional with 2 x batteries (choose either backup battery or battery module)
Certification	EMC & Safety	Medical CE, FCC (IEC 60601-1-2, 4th edition) EN 60601-1 Compliance UL 60601-1
	Dimensions (W x H x D)	583 x 387 x 68 mm/22.95 x 15.2 x 2.68 in
Physical Characteristics	VESA Mount	100 x 100; 75 x 75 mm
	Weight	7.78 kg/17.15 lb
	Operating Temperature	0 – 35 °C/32 – 95 °F
Environment	Storage Temperature	0 – 50 °C/32 – 122 °F
	Warranty	System
Battery Pack		1 year or capacity 70% and 300 cycles (whichever happens first)

*Intel® Celeron® processor available upon request.


**Either PCIe x4 or backup battery can be chosen.

Dimensions

Unit: mm

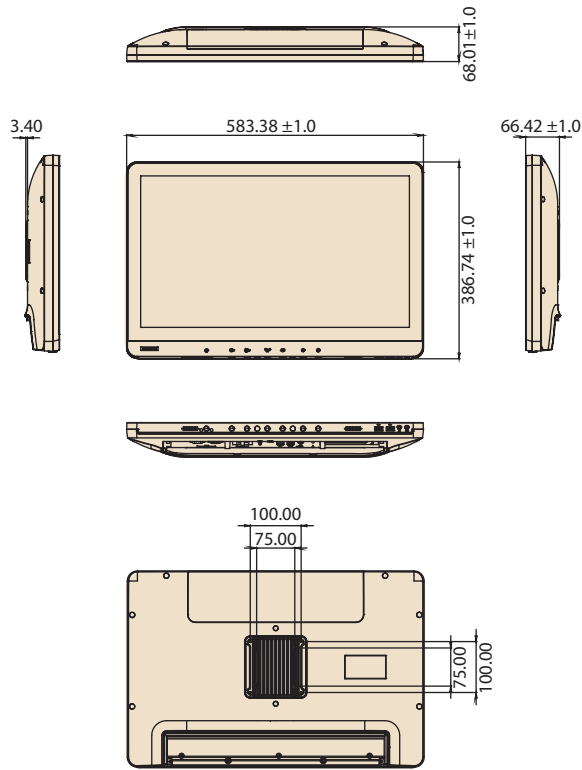


Front Function Keys




1. Power button
2. Volume down/up
3. Touchscreen status control
4. Read light control
5. Brightness down/up

I/O Ports (DC Model)



1. Headphone-out
2. Mic-in
3. 2 x USB 2.0
4. 1 x PCIe x4 slot
5. Equipotential terminal pin
6. DC-in
7. 2 x USB 3.2 (Type A)
8. 2 x USB 3.2 (Type A)
9. 1 x USB 3.2 (Type C)
10. HDMI
11. 2 x Gigabit Ethernet
12. 2 x COM (RS-232)
13. Smart card reader (optional)

I/O Ports (AC Model)




1. Headphone-out
2. Mic-in
3. 2 x USB 2.0
4. 1 x PCIe x4 slot
5. Equipotential terminal pin
6. 2 x USB 3.2 (Type A)
7. 2 x USB 3.2 (Type A)
8. 1 x USB Type-C
9. HDMI
10. 2 x Gigabit Ethernet
11. 2 x COM (RS-232)
12. AC-in
13. Smart card reader (optional)

Ordering Information

Part Number (DC Model)	Part Number (AC Model)	Description	CPU*	RAM	Touch	SSD	RFID
POC-624-12A11D-CA	POC-624-02A11D-CA	Intel® Core i7, 8GB memory, 512GB SSD, IP54, 2 x COM 1.5KV, and clear glass with P-CAP touch	i7	8GB	P-CAP	512GB	
POC-624-12A11R-CA	POC-624-02A11R-CA	Intel® Core i7, 8GB memory, 512GB SSD, IP54, 2 x COM 1.5KV, RFID reader, and clear glass with P-CAP touch	i7	8GB	P-CAP	512GB	Yes
POC-624-12B11D-CA	POC-624-02B11D-CA	Intel® Core i5, 8GB memory, 512GB SSD, IP54, 2 x COM 1.5KV, and clear glass with P-CAP touch	i5	8GB	P-CAP	512GB	
POC-624-12B11R-CA	POC-624-02B11R-CA	Intel® Core i5, 8GB memory, 512GB SSD, IP54, 2 x COM 1.5KV, RFID reader, and clear glass with P-CAP touch	i5	8GB	P-CAP	512GB	Yes

Accessories

Hot-Swapping Battery Module

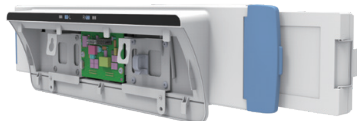

Backup Battery (Internal)



LED Indicator



Charging Station



Battery module contains 2 x battery packs



Battery Packs



Battery Module

Part Number	Description
POC-BAT-101-6A*	Backup battery (internal)
POC-BAT-201-62*	Hot-swapping battery module for POC-621/624
POC-IPSM90B2	Battery pack (2 x pcs) of POC power system
POC-IPSM90CS3	Charging station (3 x slots) of POC power system

*Choose either a backup battery or hot-swapping battery module.

Power Cord

Region	Part Number (DC Model)	Part Number (AC Model)
USA (Thailand, Philippines)	1702002600	1700001524
Europe (Indonesia)	1702002605	170203183C
UK (Singapore, Malaysia)	1700018704	170203180A
Japan (PSE)	1700000237	1700008921

Battery Pack Specification

Battery Pack Type	Lithium-ion battery
Battery Pack Capacity	90Wh
Total Capacity	180W (2 x batteries, 90W per battery)
Battery Runtime	6 ~ 8 hours
Battery Lifespan	300 cycle time \geq 70%
Capacity Indicator	LED indicator with button
Weight	540g/1.2lb

*Backup battery is 1 piece.

*Hot swap batteries are 2 pieces.

Recommended Peripherals

- Table stands (TBSD-WHA741L)
- Keyboards (KBD-MCWU1020)
- Mouses (MOU-MCWU1001)
- Scanners (SCN-MCWIG829)

For more information: https://www.advantech.com/products/peripherals/sub_4728dfba-b560-43ba-b264-de3aae98b1ff

CTOS Service

Ordering Information (Barebone Units)

Part Number (DC Model)	Part Number (AC Model)	Description	CPU	RAM	Touch	SSD
POC-624-12A110-CA	POC-624-02A110-CA	Intel® Core i7, IP54, 2 x COM 1.5KV, and clear glass with P-CAP touch (without memory and SSD)	i7	NA	P-CAP	NA
POC-624-12B110-CA	POC-624-02B110-CA	Intel® Core i5, IP54, 2 x COM 1.5KV, and clear glass with P-CAP touch (without memory and SSD)	i5	NA	P-CAP	NA

Component Offerings

Memory

Part Number	Description

Wi-Fi + BT Module

Part Number	Description
EWM-W192M202E	Intel® Dual Band Wireless-AC 9260
EWM-W165M201E	Intel® Dual Band Wireless-AX210 (WiFi 6)

NVME SSD Storage

Part Number	Description

Power Cord

Region	Part Number (DC Model)	Part Number (AC Model)
USA (Thailand, Philippines)	1702002600	1700001524
Europe (Indonesia)	1702002605	170203183C
UK (Singapore, Malaysia)	1700018704	170203180A
Japan (PSE)	1700000237	1700008921

DeviceOn/iService

Unified Remote Device Management Software



Features

- Supports Advantech devices equipped with Windows, Android, and Linux OS
- Flexible device, location, user, and permissions management
- Enables remote monitoring and control of hardware, software, and peripherals
- Supports over-the-air (OTA) firmware and software updates
- Ensures quick, easy, and secure device onboarding
- RESTful APIs for third-party system integration

Introduction

Advantech's DeviceOn/iService is a next-generation unified device management solution based on the WISE-DeviceOn platform. Designed to enable centralized monitoring and remote management, DeviceOn/iService supports Advantech devices equipped with Windows, Linux, or Android operating systems. The software also supports the management of applications and integrated peripherals, such as a barcode scanner, card reader, camera, and printer. Users can remotely access and control connected devices, take screenshots, rollout OTA upgrades, and use remote desktop capabilities for troubleshooting from any location at any time. Moreover, DeviceOn/iService supports batch operations to facilitate the management of multiple devices simultaneously for easy and convenient device configuration and deployment.

Total Management

- Devices & Hardware**
 - Windows, Linux, Android
 - Hardware, storage, battery
- Software & Peripherals**
 - Software monitoring & access
 - Screens, USB devices, printers
- Open for Expansion**
 - Peripheral integration
 - Open APIs for integration

Remote Access


- Real-Time Monitoring**
 - Connection/hardware status
 - Software/peripheral status
 - Failure notifications
- Remote Controls**
 - Power controls
 - Audio, backlight controls
 - Software controls
- Troubleshooting**
 - Screenshots
 - Remote desktop support

Operational Efficiency

- OTA updates**
 - System/software updates
 - File repository management
 - App store
- Batch Controls**
 - 1-to-many batch reboot, etc.
 - Time-saving tasks
- Setup Booster**
 - Software/peripheral watchlist
 - Roles, rule templates

Note: Some functions may vary according to the product

System Architecture

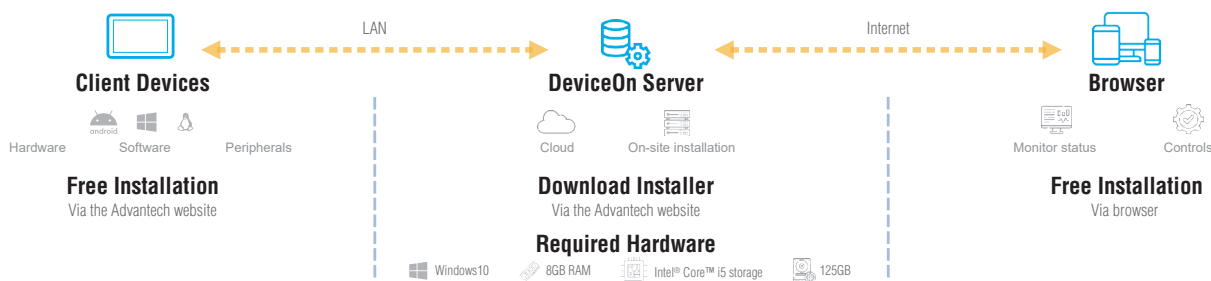

DeviceOn/iService Specifications

DeviceOn/iService Remote Device Management	Operating System	Windows 10
	Common Controls (Reboot, Shutdown)	✓
	Remote desktop	✓ (VNC)
	Device-Specific Controls (Audio, Backlight)	✓*
	Connection Status	✓
	Hardware Status	✓*
	Hard Disk Status	✓*
	Batch Operation Support	✓
	OTA Storage Management	FTP
	OTA Software Updates	✓
	Software Watchlist	✓
	Software Start/Stop	✓*
	Peripherals Watchlist	✓*

* Dependant on device model

Note:

1. DeviceOn/iService software must be downloaded from the Advantech website at <https://www.advantech.com/search/?q=DeviceOn%2FiService&st=support&sst=Utility>



ANANDIC MEDICAL SYSTEMS AG

Stadtweg 24, 8245 Feuerthalen

www.anandic.com

info@anandic.com

Tel. 0848 800 900